
Model DPH-3B • 11GPM • 550PSI

Rice

* Shown with optional Wheel and Handle Kit.

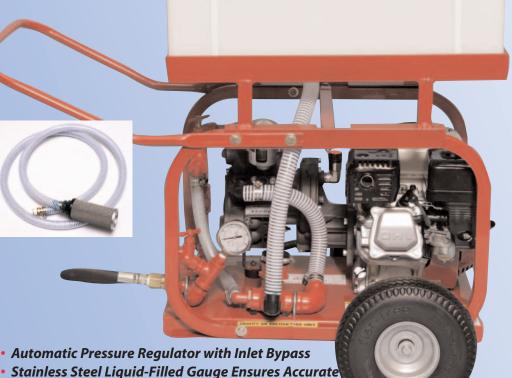

he DP-3, a triple diaphragm pump, recognized as the most versatile sought after hydrostatic test pump on the market. Exceptionally smooth and quiet operation in comparison to the twin diaphragm, the triple diaphragm requires no pressure accumulator. EXCLUSIVE, to the RICE Hydro triple diaphragm pump is the "DURAphragm technology", where pressure is spread across the entire face of the diaphragm virtually eliminating torn, damaged diaphragms. Another design upgrade is the inlet suction diaphragm assembly, eliminating the concern for ruptured diaphragms caused by pressure feeding, is now a separate assembly from the pump, which can be added at any time. The diaphragm design allows for the handling of up to a 10% chlorine solution, and the ability to be run dry without damaging the pump. A large volume, medium pressure test pump, this unit is recommended for testing up to 24" diameter lines. The DP-3 is available with Briggs & Stratton, Robin

or Honda engine options.

Ξ

0

a

Rice

Readings, with Less Flutter

Inlet Hose Assembly, with Stainless Steel Mesh Filter

Rugged Roll-Cage Construction Protects Pump from Damage

OUTLET:

PUMP:

SPECIFICATIONS

3500 Arrowhead Drive

Carson City

Nevada

89706

web site:

www.ricehydro.com

e-mail

ricehydro@aol.com

Phone:

(775) 885-1280

Fax:

(800) 998-7423

INLET: 1" hosebarb, with 9ft. hose and strainer

Inlet hose assembly included on units not purchased with tank accessory

1/2" with Quick Connect Couplings

High pressure 8ft. hose

Pressure regulator adjusting to 550 PSI

Triple Diaphragm, inner oil bath protection, innovative "DURAphragm"

technology", and helical gear reduction.

OUTPUT FLOW: 11 GPM

MAX. OUTPUT PRESSURE: 550 PSI

ENGINE: 163 CC Displacement, air-cooled, 4-cycle, Briggs or Honda engine

option available

SHIPPING DIMENSIONS: 25" x 21" x 17"

SHIPPING WEIGHT: 106#, Weight: 91#

Hydrostatic Test Pumps (5) Post Hole Diggers