

Fire Hose Testers

The FH series is the most versatile, reliable, and sought-after Fire Hose Tester on the market today. Models in this series offer “gallon per minute” flow rates up to 26 (GPM); with “pounds per square inch” testing capabilities up to 1000 (PSI). These hose testers are designed to safely test any diameter fire hose in accordance with NFPA 1962 testing standards. Available in Gasoline, Electric and Pneumatic driven models. RICE units can be “Build to Suit” with various voltage, phase, hertz, and explosion-proof motor configurations offered. A large 2 & 1/2 inch swivel inlet aids in the ability to quickly fill and eliminate excess air from the test environment. The FH Series is a safe, less costly and more efficient way to test your fire hose, keeping your pumper ready for action, where it should be.



FH3 3 GPM 500 PSI

- Five Year Full Product Warranty
- Four independently controlled 1 & 1/2 inch Stainless Steel outlet ballvalves with male (NST) couplings
- 2 & 1/2 inch Swivel inlet enables speedy filling of lines, and expedites the elimination of excess air
- 1 HP Electric motor TEFC, 110V or 220V, 50/60HZ
- Stainless Steel liquid filled gauge, ensures accurate readings with less flutter
- Included: Casters - 4 inch, 2 Rigid & 2 Swivel



EL-FHT 3 GPM 500 PSI

- Five Year Full Product Warranty
- Two independently controlled 1 & 1/2 inch Stainless Steel outlet ballvalves with male (NST) couplings
- Dual inlets - 3/4 inch and 2 & 1/2 inch Swivel inlet enables speedy filling of lines and expedites the elimination of excess air
- 1 HP Electric motor TEFC, 110V or 220V, 50/60HZ
- Stainless Steel liquid filled gauge, ensures accurate readings with less flutter
- Optional: Casters - 4 inch, 2 Rigid & 2 Swivel



FH2-H 3.5 GPM 1000 PSI

- Five Year Full Product Warranty
- Four Independently controlled 1 & 1/2 inch Stainless Steel outlet ballvalves with male (NST) couplings
- 2 & 1/2 inch Swivel inlet enables speedy filling of lines and expedites the elimination of excess air
- 196 CC 6.5 HP, air cooled 4 cycle, with engine oil alert
- Stainless Steel liquid filled gauge, ensures accurate readings with less flutter
- Included: Casters - 4 inch, 2 Rigid & 2 Swivel



FH-12.5/500 12.5 GPM 500 PSI

- Five Year Full Product Warranty
- Four independently controlled 1 & 1/2 inch Stainless Steel outlet ballvalves with male (NST) couplings
- 2 & 1/2 inch Swivel inlet enables speedy filling of lines and expedites the elimination of excess air
- 270 CC 9 HP, air cooled 4 cycle, with engine oil alert
- Stainless Steel liquid filled gauge, ensures accurate readings with less flutter
- Included: Casters - 6 inch, 4 Swivel



FH5-E 5 GPM 800 PSI

- Five Year Full Product Warranty
- Four independently controlled 1 & 1/2 inch Stainless Steel outlet ballvalves with male (NST) couplings
- 2 & 1/2 inch Swivel inlet enables speedy filling of lines and expedites the elimination of excess air
- 3 HP Electric motor TEFC, 220V, 60HZ
- Stainless Steel liquid filled gauge, ensures accurate readings with less flutter
- Included: Casters - 4 inch, 2 Rigid & 2 Swivel

FH Series Accessories

LINEAGE-1

- Meets NFPA 1962 requirements of securing and anchoring firehoses while being tested. US Patent #7,905,455
- Locking hitch pins enclose and secure the hose into the Lineage
- Quick links for fast and easy anchoring of this device
- Safely limits the movement of the line in the event of rupture
- The Lineage is designed with multiple locking holes to accommodate various hose sizes
- Heavy gauge welded steel frame, powder coated to withstand the elements.



FHWA-1

- Ideal for Haz-Mat and contaminated equipment wash down
- Dual tips offer the option of either spraying water only or a soap and water solution
- 50 feet of high-pressure hose for long range mobility
- Adjustable injector for soap and other cleaning solvents
- Quick disconnects for easy on/off hose connection
- Only available for the EL-FHT and FH3 models



Adapters

- Machined Brass for durability
- Male NST adapters facilitate test pump to hose connections
- Included: 1 & 1/2 male (NST) on all FH-Series hose testers, one adapter per outlet
- Optional: 1 & 1/2 X 2 & 1/2 male (NST)
- Made in the USA



We Offer Custom “Build to Suit Options”
Some Examples are Below


FH2H-L4

3.5 GPM up to 1000 PSI with Four Lay Flat Outlet Configuration



FH-12.5/500-TEN

12.5 GPM up to 500 PSI with Ten Outlet Configuration

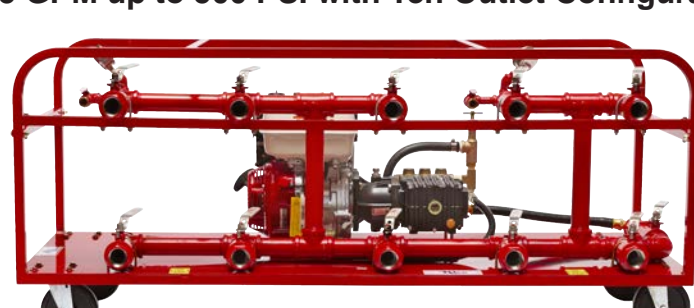

FH3-8-BN

3 GPM up to 500 PSI Bench Mounted Eight Outlet Nozzle and Valve Tester



Contact The Factory with Your Requirements and Specifications